SemiTank

Memory Module Specifications

R&D | OEM | ODM SSD & DDRAM

ST26D4P12S604G

SemiTank S6 4GB DDR4 2666 U-DIMM

DESCRIPTION

This document describes DDR4 288 Pin U-DIMM Non-ECC, P/N: ST26D4P12S604G. This Memory Module based on Capacity 4GB, Frequency 2666 Mhz, Latency CL19, Data Transfer Bandwidth 21.300 MB/s. DDR4 288 Pin U-DIMM Non-ECC uses gold contact fingers and used for:

- * Desktop.
- * All in One Computer.
- * Industrial Computer.
- * Mini Computer.


The electrical and mechanical specifications are as follows:

Feature

- Increased Fundamental Frequency, Faster Speeds.
- Unleashed Capacity, Stronger, Multitasking.
- Improved Structural Composition, Greater Efficiency.
- Reduced Working Voltage. Better Energy Efficiency.
- RoHS Compliant and Halogen-Free.

SPECIFICATIONS

| Module type | DDR4 288 Pin U-DIMM Non-ECC |
|-------------------------------|-----------------------------|
| Product Dimensions | 133.35*30.75*3.18 mm |
| Series | S6 Series |
| Frequency | 2666 Mhz |
| Latency | CL19 |
| Data Transfer Bandwidth | PC4 21300 21.300 MB/s |
| | |
| Capacity | 4GB |
| Capacity Voltage | 4GB 1.2V |
| . , | |
| Voltage | 1.2V |
| Voltage Operating Temperature | 1.2V 0°C to +70°C |

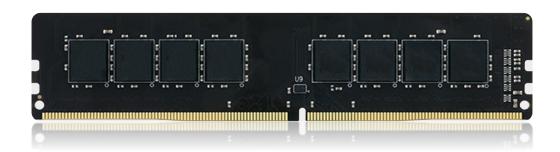

*Note:

- We reserve the right to modify product specifications without prior notice.
- Check "Product Compatibility Inquiry" before purchase for further info.