SemiTank

Memory Module Specifications

R&D | OEM | ODM SSD & DDRAM

ST32D4P12S604G

SemiTank S6 4GB DDR4 3200 U-DIMM

DESCRIPTION

This document describes DDR4 288 Pin U-DIMM Non-ECC, P/N: ST32D4P12S604G. This Memory Module based on Capacity 4GB, Frequency 3200 Mhz, Latency CL22, Data Transfer Bandwidth 25.600 MB/s. DDR4 288 Pin U-DIMM Non-ECC uses gold contact fingers and used for:

- * Desktop.
- * All in One Computer.
- * Industrial Computer.
- * Mini Computer.


The electrical and mechanical specifications are as follows:

Feature

- Increased Fundamental Frequency, Faster Speeds.
- Unleashed Capacity, Stronger, Multitasking.
- Improved Structural Composition, Greater Efficiency.
- Reduced Working Voltage. Better Energy Efficiency.
- RoHS Compliant and Halogen-Free.

SPECIFICATIONS

Module type	DDR4 288 Pin U-DIMM Non-ECC
Product Dimensions	133.35*30.75*3.18 mm
Series	S6 Series
Frequency	3200 Mhz
Latency	CL22
Data Transfer Bandwidth	PC4 25600 25.600 MB/s
Capacity	4GB
Capacity Voltage	4GB 1.2V
. ,	
Voltage	1.2V
Voltage Operating Temperature	1.2V 0°C to +70°C

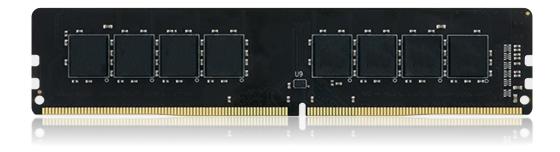

*Note:

- We reserve the right to modify product specifications without prior notice.
- Check "Product Compatibility Inquiry" before purchase for further info.